

TC320

Business Analog Portable Radio

Unique for its compact and professional design, as well as its superb sound quality. Its strong casing prevents damage against drops of up to 5ft. This radio enables businesses to enjoy dependable communications at an extremely low cost.



Highlights

- **Wide Communication Range**
2W output power has a range of up to 6 miles.
- **Durable Casing**
Compact durable design that can with stand a 1.5 meter drop.
- **Long Battery Life**
1700mAh high capacity Li-Ion battery lasts approximately 12hrs.
- **User Friendly Design**
With its ergonomic design, this slim and compact radio can enhance user comfort, while maintaining a professional and fashionable appearance.
- **Double Injection Molding**
The combination of double injection molding and grip technology brings users a comfortable and convenient operation experience.
- **Mini-USB Interface**
Chargeable and Programmable through the Mini-USB port, plug directly into an outlet or the optional charger.

Features

- Audio Compandor
- Scrambler compatible w/ TC320 UHF2 & TC518
- VOX Earpiece
- Battery Strength Indicator
- High / Low Power Switchable
- Programmable 25 / 12.5 KHz Channel Spacing
- Monitor
- CTCSS / CDCSS and Squelch Tail Elimination
- Channel Scan
- Auto Battery Save
- Low Battery Alert
- Busy Channel Lockout (BCL)
- Time-out-timer (TOT)
- PC Programmable
- Wired Clone

Applications

Retail

Hotel

Restaurants

Education

Hospital

Business

Property Management



Accessories

Included

- Li-Ion Battery
- Power Supply
- Antenna
- Belt Clip
- Neck Strap

Optional



Earpiece with In-Line MIC, PTT, & VOX
EHS09



Rapid-rate Charger
(for Li-Ion Battery)
CH05L01



Programming Cable
(USB Port)
PC30



6-Unit Switching Power
(Combine w/ CH05L01)
PS4001


See website for full list

Specifications

General	Frequency Range	UHF1: 400 - 470MHz ; UHF2: 450-470MHz
	Channel Capacity	16
	Channel Spacing	25 / 12.5KHz
	PLL Channel Stepping	5 kHz, 6.25 kHz
	Operating Voltage	3.7V (rated)
	RF Power Output	2W
	Battery	1700mAh (Li-Ion)
	Battery Life (5-5-90 Duty Cycle)	Approx. 10hrs
	Frequency Stability	± 0.5ppm
	Operating Temperature	-4° F ~ 131° F
	Antenna Impedance	50 Ω
	Dimensions (HxWxD)	3.94 x 1.89 x 1.06 Inches
	Weight	4.76oz
	FCC ID	See website for full list
	Canada Industry ID	See website for full list



Your Local Dealer

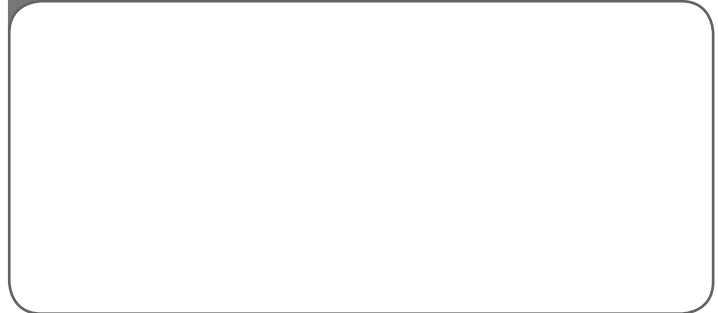

Hytera reserves the right to change product designs or specifications at any time. If you have any questions regarding the accuracy of this information please contact your local sales representative or Hytera directly.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2014 Hytera Co., Ltd. All rights reserved.



Hytera America

Address: 3315 Commerce Parkway
Miramar, Florida 33025, USA
Tel: 800-845-1230 **Fax:** 954-846-1672
http: //www.hytera.us
Stock Code: 002583.SZ

Hytera
Respond & Achieve

EN20140228A